






# Multi-entry Panel Home Videophone

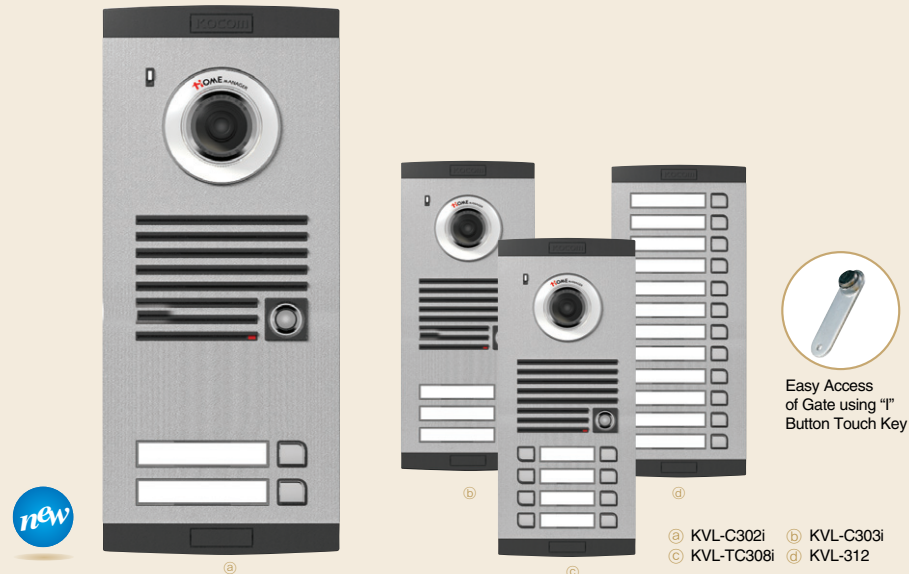

## [ Multi-entry Panel Configuration ]

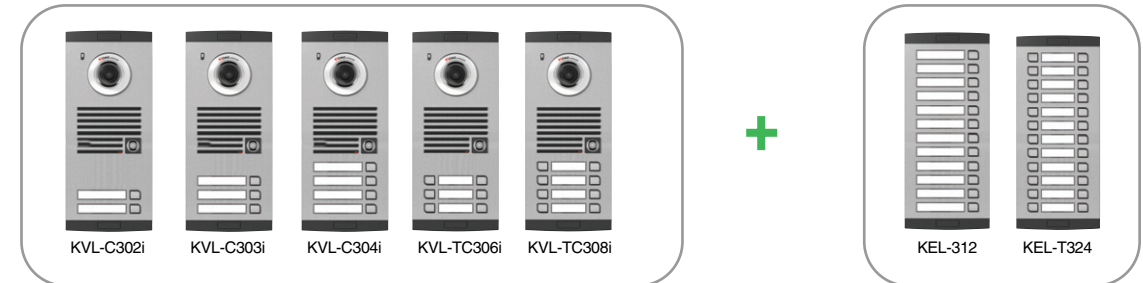

### Diagram

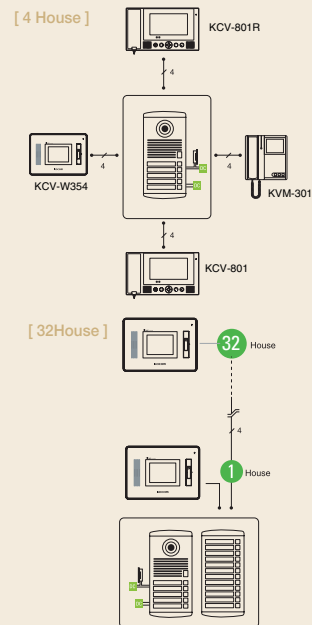

## [ KVL-C302i/C303i/C304i ] [ KVL-C306i/C308i ] [ KEL-312 / T324 ]

- Modern & Stylish Design
- Call, Communication & Door Open with Monitor
- Door Open by I-Button Key (Dallas Chip)
- Max. 1,300 Numbers of I-Button Key Registration.
- White LED On in Low Illumination.
- Name Plate LED On in Operation.
- Camera Angle Adjustable (Up, Down, Right & Left).
- Receiving & Calling Audio Volume Adjustable.
- Door Lock Connection



### Specifications

Model No.	KVL-C302i / KVL-C303i / KVL-C304i / KVL-TC306i / KVL-TC308i
Power	DC 12V / 1.5A
Power Consumption	1.2W at stand by, 5.6W in operation
Horizontal Resolution	Over 420 TV Lines
Assurance Temperature	-20 °C ~ +50 °C
TV System	NTSC / PAL
Lens	F = 3.6mm, F:1.6
Camera Angle	Normal Lens 96.1 °, Camera Angle Adjustable
AGC Control,	Auto
BLC	Auto
Body Material	Stainless Aluminum
Min. Illumination	0.1Lux (LED On)
Mount type	Flush Mount
Dimension (mm)	125(W) x 290(H) x 48.4(D)
Monitor Connection	KCV-801R, KCV-801, KCV-W354, KVM-301

• The product may include option or additional functions.

### Dimension

